



## ER1A~ER1J

---


---

---




# ER1A~ER1J


## RATING AND CHARACTERISTIC CURVES

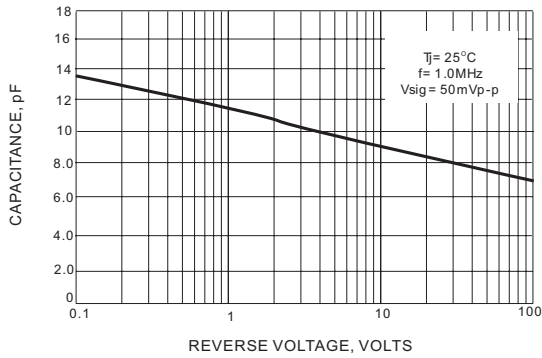


**FIG.1 TYPICAL JUNCTION CAPACITANCE**

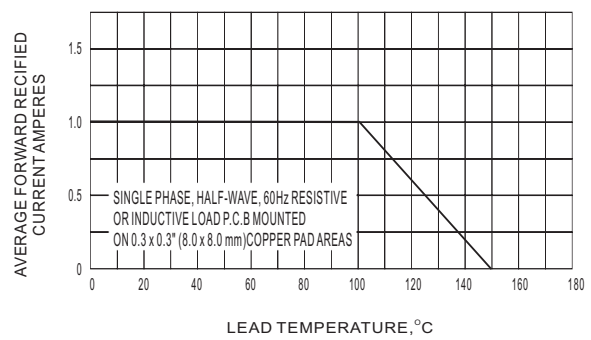


**FIG.2 MAXIMUM AVERAGE FORWARD CURRENT DERATING**

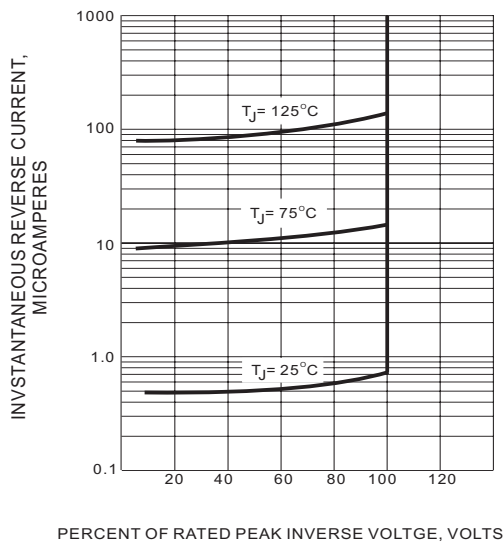

**FIG.3 TYPICAL REVERSE CHARACTERISTICS**

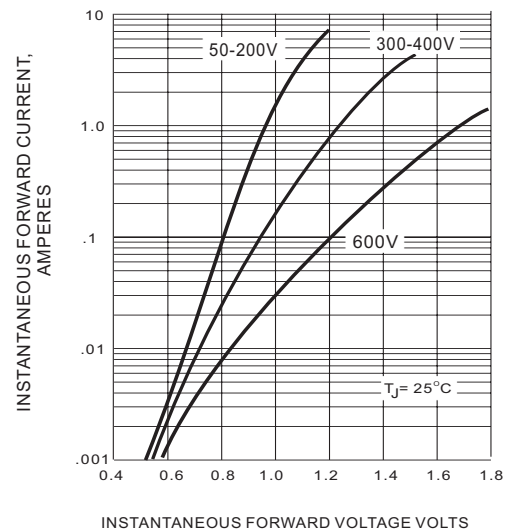

**FIG.4 TYPICAL FORWARD CHARACTERISTICS**

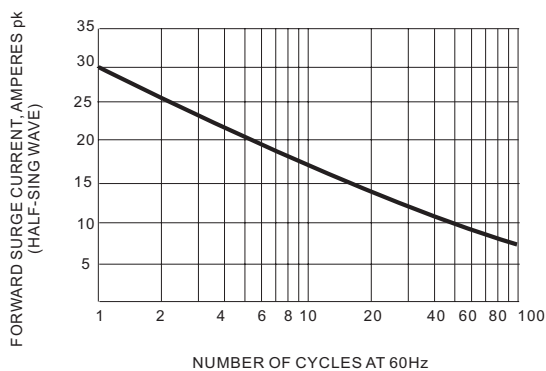


**FIG.5 MAXIMUM NON-REPETITIVE SURGE CURRENT**



---

## MOUNTING PAD LAYOUT

---

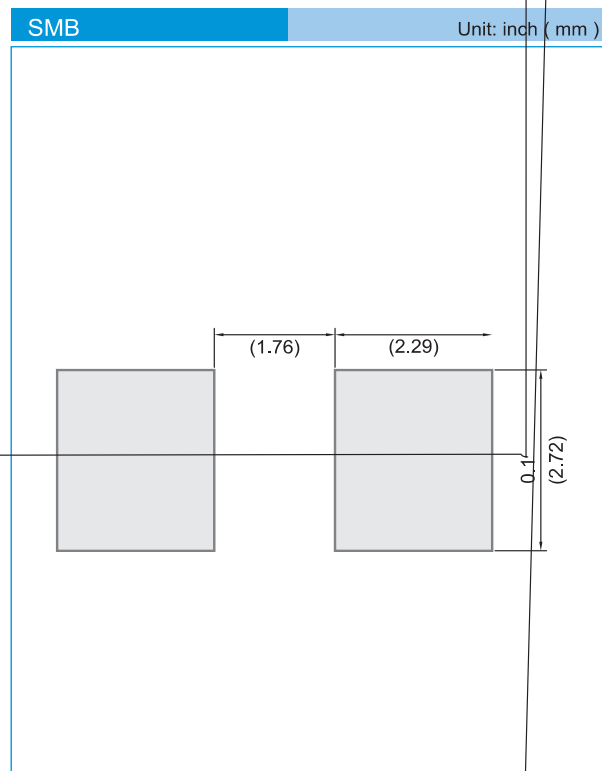

---

## ORDER INFORMATION

---

- Packing information
  - T/R - 3K per 13" plastic Reel
  - T/R - 0.5Kper 7" plastic Reel

---

## LEGAL STATEMENT

---

### Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.